


Typ MT4 – Zylinder mit Schwenkzapfen in Zylindermitte

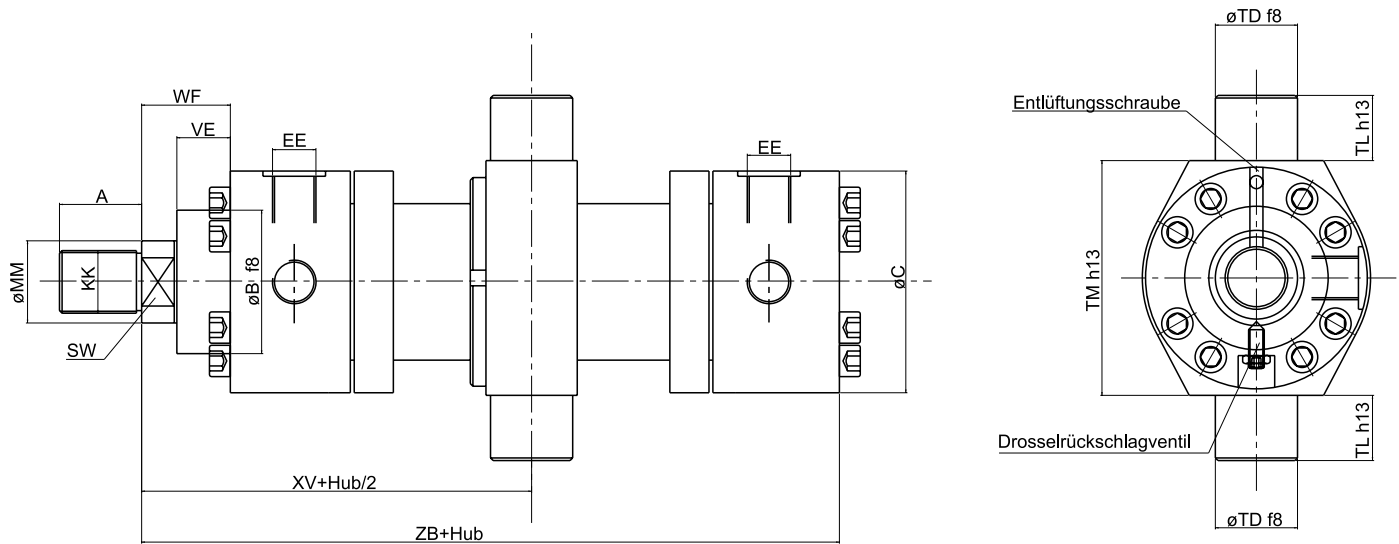

Kolbendurchmesser	50		63		80		100		125		140		160		180		200		250		
øMM (Kolbenstangen)	32	36	40	45	50	56	63	70	80	90	90	100	110	110	125	125	140	160	180		
4 (Flächenverhältnis)	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	
EE (Metrisches Gewinde)	M22x1,5		M27x2		M27x2		M33x2		M33x2		M42x2		M42x2		M42x2		M42x2		M50x2		
EE (Whitworth-Rohrgew.)	G1/2		G3/4		G3/4		G1 G1		G11/4		G11/4		G11/4		G11/4		G11/2				
KK (Kolbenstangengewinde)	M27x2		M33x2		M42x2		M48x2		M64x2		M72x3		M80x3		M90x3		M100x3		M125x4		
SW (Schlüsselweite)	27	30	32	36	41	46	50	60	65	75	75	85	85	95	115	115	120	140	160		
Befestigungsschrauben	M10		M10		M12		M16		M16		M20		M20		M24		M24		M30		
ZJ/ZB (+Hub)	240		270		300		335		390		430		460		500		540		640		
XC/XQ (+Hub)	305		348		395		442		520		575		617		685		756		903		
ZP (+Hub)	256		298		332		371		430		470		505		550		596		703		
XV** (+Hub/2)	143,5		161,5		180,0		199,0		233,0		250,5		272,5		297,5		320,5		376,5		
A	36		45		56		63		85		90		95		105		112		125		
øB f8	63		75		90		110		132		145		160		180		200		250		
øC***	110		125		145		170		215		255		270		305		320		400		
øCDH9/øCX H7	32		40		50		63		80		90		100		110		125		160		
øD***	60		78		100		120		150		170		190		219		244,5		298,5		
EWh12/EXh12	32		40		50		63		80		90		100		110		125		160		
øFB h13	13,5		13,5		17,5		22		22		26		26		33		33		39		
øFC je13	132		150		180		212		250		300		315		365		385		475		
L/LT	65		78		95		107		130		145		157		185		216		263		
MR-1/MS-1	40		50		60		70		90		100		110		120		135		170		
NC-1***	155		175		210		250		290		340		360		420		440		540		
øTD f8	32		40		50		63		80		90		100		110		125		160		
TL h13	25		32		40		50		63		70		80		90		100		125		
TM h13	112		125		150		180		224		265		280		320		335		425		
VD	4		4		4		5		5		5		5		5		5		8		
VE	29		32		36		41		45		45		50		55		61		71		
WC	22		25		28		32		36		36		40		45		45		50		
WF	47		53		60		68		76		76		85		95		101		113		
WS***	25		28		32		36		40		40		45		50		56		63		
Z	4°		4°		4°		4°		4°		4°		4°		4°		4°		4°		
zulässiger Hub in mm																					
	50	1026	1338	1284	1671	1592	2048	2049	2583	2661	3441	3022	3800	3263	4016	3501	4624	4094	5234	5416	6976
	100	682	902	858	1131	1067	1390	1382	1760	1801	2353	2050	2600	2213	2746	2371	3166	2782	3588	3695	4799
Betriebsdruck in bar	150	529	709	669	892	835	1098	1087	1395	1420	1871	1619	2068	1748	2183	1871	2520	2200	2858	2933	3834
	200	438	594	556	749	696	924	911	1178	1193	1583	1362	1751	1471	1847	1573	2134	1854	2424	2479	3259
	250	376	516	479	652	602	806	790	1029	1038	1387	1187	1535	1282	1618	1369	1872	1617	2127	2169	2867